



MS2/MS3 SERIES(IE2/IE3)

THREE PHASE ALUMINIUM HOUSING MOTOR

Three phase, MS2/MS3(IE2/IE3) series aluminium housing motors are acknowledged that having a good fame for quality and reliability, they are suitable for driving machines which do not have special requirement, such as machine tools, pumps, blowers, etc.


- Superior finish - Externally Ventilated - Light weight construction
- Top mounted terminal box - IP55 Protection
- Interchangeable foot mounting and flange mounting

Operating Conditions:

Ambient temperature: -15°C~≤40°C

Altitude: not exceed 1000m

Rated voltage: ±5%

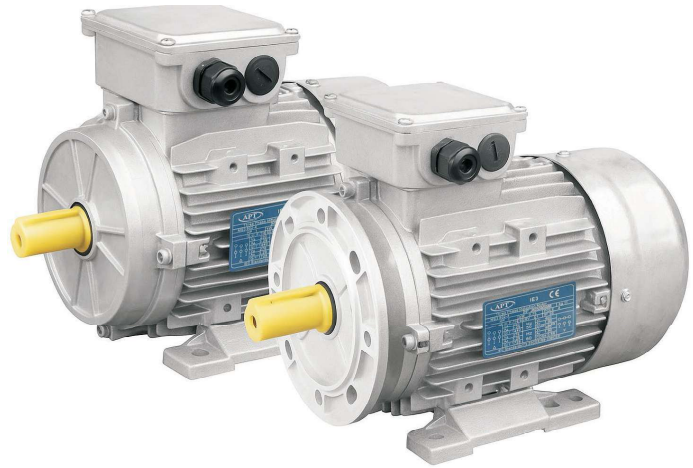

MS2 Series IE2 Efficiency Motors Technical Data (at 50HZ) - 2 pol

Model	Power (kW)	Current(A)			Current(A)			Current(A)			Speed (r/min)	Eff. (%)	Power Factor (cos φ)	Tst/Tn (Times)	Tmax/Tn (Times)	Tmin/Tn (Times)	Ist/In (Times)	Noise dB(A)	W.T (kg)	Inertia kg*m²
		220V	380V	660V	230V	400V	690V	240V	415V	720V										
MS2 562-2	0.12	0.75	0.44	0.25	0.72	0.41	0.24	0.69	0.4	0.23	2700	53.6	0.78	2.2	5.2	2.1		57	3.4	0.000023
MS2-631-2	0.18	0.98	0.57	0.33	0.94	0.54	0.31	0.9	0.52	0.3	2720	60.4	0.80	2.3	5.5	2.3		61	3.8	0.000031
MS2-632-2	0.25	1.25	0.72	0.42	1.29	0.69	0.4	1.25	0.66	0.38	2720	64.8	0.81	2.3	5.5	2.3		61	4	0.000060
MS2-711-2	0.37	1.72	1	0.57	1.65	0.96	0.55	1.58	0.91	0.53	2755	69.5	0.81	2.2	6.1	2.3		64	6.5	0.000075
MS2-712-2	0.55	2.37	1.4	0.79	2.27	1.3	0.76	2.18	1.26	0.73	2790	74.1	0.82	2.3	6.1	2.3		64	6.7	0.000090
MS2 713-2	0.75	3.23	1.86	1.08	3.07	1.77	1.02	2.96	1.71	0.99	2810	77.4	0.79	3.4	3.5	3	5.8	65	7.5	0.000480
MS2 801-2	0.75	3.15	1.82	1.05	2.99	1.73	1.00	2.88	1.66	0.96	2840	77.4	0.81	3.3	3.5	2.7	6.9	67	8.9	0.000852
MS2 802-2	1.1	4.43	2.56	1.48	4.21	2.43	1.40	4.06	2.34	1.35	2860	79.6	0.82	3.5	3.7	2.8	7.2	67	10.6	0.001109
MS2 803-2	1.5	5.99	3.46	2.00	5.69	3.29	1.90	5.49	3.17	1.83	2860	81.3	0.81	3.7	3.8	2.9	7.7	70	13	0.001430
MS2 90S-2	1.5	5.85	3.38	1.95	5.56	3.21	1.85	5.36	3.09	1.79	2860	81.3	0.83	4.5	3.5	2.7	8.2	72	13.2	0.001430
MS2 90L1-2	2.2	8.38	4.84	2.79	7.96	4.60	2.66	7.68	4.43	2.56	2870	83.2	0.83	4.5	4.1	2.7	7.4	72	16.1	0.002181
MS2 90L2-2	3	11.2	6.49	3.75	10.7	6.17	3.56	10.29	5.94	3.43	2880	84.6	0.83	4.5	4.1	3	9.7	74	20	0.002904
MS2 100L1-2	3	10.9	6.26	3.62	10.3	5.95	3.44	9.94	5.74	3.31	2900	84.6	0.86	3.7	3.7	2.6	9.6	76	22.7	0.003008
MS2 100L2-2	4	13.9	8.05	4.65	13.2	7.65	4.42	12.8	7.37	4.26	2890	85.8	0.88	3.6	3.4	2.6	9.5	77	26	0.003934
MS2 112M-2	4	14.1	8.14	4.70	13.4	7.73	4.47	12.9	7.46	4.30	2910	85.8	0.87	3.4	3.8	2.2	9.7	77	26.4	0.006266
MS2 112L-2	5.5	18.9	10.9	6.30	18.0	10.4	5.99	17.3	9.99	5.77	2920	87	0.88	4	4.3	3	11	78	32.1	0.007819
MS2 132S1-2	5.5	18.9	10.9	6.30	18.0	10.4	5.99	17.3	9.99	5.77	2920	87	0.88	3.9	4	2.1	9.9	80	42.3	0.012022
MS2 132S2-2	7.5	25.2	14.5	8.39	23.9	13.8	7.97	23.0	13.3	7.68	2910	88.1	0.89	3.5	3.7	1.9	9.5	80	46.2	0.014635
MS2 132M1-2	9.2	31.0	17.9	10.3	29.5	17.0	9.82	28.4	16.4	9.47	2900	88.7	0.88	3.5	3.9	2.4	9.8	81	51.6	0.016303
MS2 132M2-2	11	37.7	21.7	12.6	35.8	20.7	11.9	34.5	19.9	11.5	2930	89.4	0.86	3.5	3.9	2.4	11.5	83	54.5	0.019439
MS2 160M1-2	11	36.4	21.0	12.1	34.6	20.0	11.5	33.3	19.2	11.1	2940	89.4	0.89	3.2	3.2	2.2	9	86	79.2	0.048471
MS2 160M2-2	15	48.6	28.0	16.2	46.1	26.6	15.4	44.5	25.7	14.8	2930	90.3	0.9	3.2	3.2	2.2	9	86	96.6	0.059421
MS2 160L-2	18.5	58.9	34.0	19.6	55.9	32.3	18.6	53.9	31.1	18.0	2930	90.9	0.91	3.2	3.2	2.2	9	86	102.5	0.068807
MS2 180M-2	22	69.7	40.2	23.2	66.2	38.2	22.1	63.8	36.8	21.3	2950	91.3	0.91	2.5	2	1.4	8.1	91	128	0.095016
MS2 200L1-2	30	94.3	54.4	31.4	89.6	51.7	29.9	86.3	49.9	28.8	2950	92	0.91	2.5	3.3	1.3	8.8	94	158	0.122246
MS2 200L2-2	37	115.7	66.8	38.6	109.9	63.4	36.6	105.9	61.2	35.3	2960	92.5	0.91	2.8	3.5	1.3	9.6	94	181.3	0.148816

MS2 Series IE2 Efficiency Motors Technical Data (at 50HZ) - 4 pol

Model	Power (kW)	Current(A)			Current(A)			Current(A)			Speed (r/min)	Eff. (%)	Power Factor (cos φ)	Tst/Tn (Times)	Tmax/Tn (Times)	Tmin/Tn (Times)	Ist/In (Times)	Noise dB(A)	W.T (kg)	Inertia kg*m ²
		220V	380V	660V	230V	400V	690V	240V	415V	720V										
MS2-631-4	0.12	0.74	0.43	0.25	0.71	0.41	0.23	0.68	0.39	0.23	1310	59.1	0.72	2.2	4.4	2.1		52	4.1	0.000050
MS2-632-4	0.18	1	0.58	0.33	0.96	0.55	0.32	0.92	0.53	0.31	1310	64.7	0.73	2.2	4.4	2.1		52	4.6	0.000060
MS2-633-4	0.25	1.29	0.75	0.43	1.24	0.71	0.41	1.18	0.69	0.39	1340	68.5	0.74	2.2	5.2	2.1		55	5.6	0.000080
MS2-711-4	0.25	1.29	0.75	0.43	1.24	0.71	0.41	1.18	0.69	0.39	1340	68.5	0.74	2.2	5.2	2.1		55	6.3	0.000080
MS2-712-4	0.37	1.78	1.03	0.59	1.7	0.98	0.57	1.63	0.94	0.54	1340	72.7	0.75	2.2	5.2	2.1		55	6.8	0.000130
MS2-713-4	0.55	2.49	1.4	0.83	2.39	1.4	0.8	2.29	1.32	0.76	1390	77.1	0.75	2.3	5.2	2.4		58	8.5	0.000180
MS2-801-4	0.55	2.49	1.4	0.83	2.39	1.4	0.8	2.29	1.32	0.76	1390	77.1	0.75	2.3	5.2	2.4		58	11.5	0.000180
MS2 802-4	0.75	3.31	1.91	1.10	3.14	1.81	1.05	3.03	1.75	1.01	1410	79.6	0.75	3	2.9	2.4	5.8	58	11.1	0.002060
MS2 90S-4	1.1	5.01	2.89	1.67	4.76	2.75	1.59	4.59	2.65	1.53	1420	81.4	0.71	2.8	3.1	2.6	5.6	61	13.9	0.002873
MS2 90L-4	1.5	6.71	3.88	2.24	6.38	3.68	2.13	6.15	3.55	2.05	1420	82.8	0.71	3	3.1	2.7	6.2	61	16.9	0.003709
MS2 100L1-4	2.2	8.92	5.15	2.97	8.47	4.89	2.82	8.17	4.72	2.72	1440	84.3	0.77	3.3	3.6	2.9	7.6	64	22.4	0.007306
MS2 100L2-4	3	11.8	6.83	3.95	11.2	6.49	3.75	10.8	6.26	3.61	1440	85.5	0.78	3.4	3.6	3	7.4	64	26.4	0.009053
MS2 112M-4	4	15.0	8.66	5.00	14.3	8.23	4.75	13.7	7.93	4.58	1440	86.6	0.81	2.9	3.1	2.3	8.2	65	32.3	0.013305
MS2 132S-4	5.5	20.1	11.6	6.71	19.1	11.0	6.37	18.4	10.6	6.14	1450	87.7	0.82	2.6	3.4	2.2	8.7	71	43	0.027736
MS2 132M-4	7.5	26.5	15.3	8.83	25.2	14.5	8.39	24.3	14.0	8.09	1450	88.7	0.84	3.1	3.4	2.1	8.8	71	52.6	0.035864
MS2 132L-4	9.2	31.9	18.4	10.6	30.3	17.5	10.1	29.2	16.9	9.75	1450	89.2	0.85	2.9	3.2	2	8.8	74	59	0.041954
MS2 160M-4	11	38.4	22.2	12.8	36.5	21.0	12.2	35.1	20.3	11.7	1460	89.8	0.84	2.5	2.9	1.6	7.3	75	83	0.089630
MS2 160L1-4	15	51.9	29.9	17.3	49.3	28.4	16.4	47.5	27.4	15.8	1460	90.6	0.84	2.9	3	1.7	8.2	75	103.5	0.118354
MS2 160L2-4	18.5	62.8	36.3	20.9	59.7	34.4	19.9	57.5	33.2	19.2	1460	91.2	0.85	2.9	3	1.7	8.1	78	114.5	0.136633
MS2 180M-4	18.5	61.4	35.4	20.5	58.3	33.7	19.4	56.2	32.4	18.7	1460	91.2	0.87	2.4	3	1.8	7.8	80	119	0.155064
MS2 180L-4	22	71.8	41.5	23.9	68.2	39.4	22.7	65.8	38.0	21.9	1460	91.6	0.88	2.4	2.8	1.7	7.7	80	129	0.173293
MS2 200L-4	30	99.5	57.4	33.2	94.5	54.6	31.5	91.1	52.6	30.4	1470	92.3	0.86	3.2	3.7	2.3	9.5	83	169.2	0.242313

MS2 Series IE2 Efficiency Motors Technical Data (at 50HZ) - 6 pol

Model	Power (kW)	Current(A)			Current(A)			Current(A)			Speed (r/min)	Eff. (%)	Power Factor (cos φ)	Tst/Tn (Times)	Tmax/Tn (Times)	Tmin/Tn (Times)	Ist/In (Times)	Noise dB(A)	W.T (kg)	Inertia kg*m ²
		220V	380V	660V	230V	400V	690V	240V	415V	720V										
MS2-711-6	0.18	1.26	0.73	0.42	1.21	0.7	0.4	1.16	0.67	0.39	870	56.6	0.66	2	4	1.9		52	6.2	0.001100
MS2-712-6	0.25	1.57	0.91	0.52	1.5	0.86	0.5	1.44	0.83	0.48	870	61.6	0.68	2	4	1.9		52	6.5	0.001400
MS2-801-6	0.37	2.05	1.2	0.68	1.96	1.1	0.65	1.88	1.1	0.63	880	67.6	0.7	2	4.7	1.9		54	12	0.001600
MS2-802-6	0.55	2.74	1.6	0.91	2.62	1.5	0.87	2.51	1.45	0.84	880	73.1	0.72	2.1	4.7	1.9		54	12.5	0.001900
MS2 90S-6	0.75	3.77	2.18	1.26	3.58	2.07	1.19	3.45	1.99	1.15	935	75.9	0.69	2.4	2.6	2.2	4.7	59	13	0.003365
MS2 90L-6	1.1	5.37	3.10	1.79	5.10	2.95	1.70	4.92	2.84	1.64	940	78.1	0.69	2.7	2.7	2.3	5	59	16.4	0.004805
MS2 100L-6	1.5	6.87	3.97	2.29	6.53	3.77	2.18	6.29	3.63	2.10	960	79.8	0.72	2.9	3	2.3	6.2	61	21.6	0.009554
MS2 112M-6	2.2	9.44	5.45	3.15	8.96	5.18	2.99	8.64	4.99	2.88	950	81.8	0.75	2.5	2.6	2	5.6	64	29.5	0.016969
MS2 132S-6	3	12.5	7.20	4.16	11.8	6.84	3.95	11.4	6.59	3.81	960	83.3	0.76	2.2	2.6	1.7	6.1	64	35.2	0.029932
MS2 132M1-6	4	16.6	9.58	5.53	15.8	9.10	5.25	15.2	8.77	5.06	965	84.6	0.75	2.5	2.6	1.7	6.5	68	45	0.040259
MS2 132M2-6	5.5	22.7	13.1	7.58	21.6	12.5	7.20	20.8	12.0	6.94	965	86	0.74	3	2.9	1.9	7.2	68	53.5	0.053408
MS2 132L-6	7.5	30.2	17.4	10.1	28.7	16.6	9.56	27.6	16.0	9.21	970	87.2	0.75	3.7	3.1	2.2	8.2	68	66.2	0.068087
MS2 160M-6	7.5	30.6	17.7	10.2	29.1	16.8	9.69	28.0	16.2	9.34	970	87.2	0.74	2.8	2.9	1.6	7.1	68	72.6	0.089688
MS2 160L-6	11	42.9	24.8	14.3	40.8	23.6	13.6	39.3	22.7	13.1	970	88.7	0.76	2.9	2.7	1.6	7.3	73	89.5	0.122730
MS2 180L-6	15	53.0	30.6	17.7	50.4	29.1	16.8	48.5	28.0	16.2	975	89.7	0.83	2.2	2.7	1.2	8	79	130	0.254063
MS2 200L1-6	18.5	64.9	37.5	21.6	61.6	35.6	20.5	59.4	34.3	19.8	975	90.4	0.83	2.1	2.9	1.5	8.3	82	149	0.303941
MS2 200L2-6	22	76.7	44.3	25.6	72.9	42.1	24.3	70.3	40.6	23.4	975	90.9	0.83	2.2	3	1.6	8.9	82	167	0.353160

MS3 Series IE3 Efficiency Motors Technical Data (at 50HZ) - 2 pol

Model	Power (kW)	Current(A)			Current(A)			Current(A)			Speed (r/min)	Eff.			Power Factor	Tstart/Tn (Times)	Tmax/Tn (Times)	Tmin/Tn (Times)	Is/In (Times)	Noise dB(A)	W.T (kg)	Inertia kg*m ²
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%								
MS3 631-2	0.18	0.96	0.55	0.32	0.91	0.53	0.30	0.88	0.51	0.29	2850	65.9	63.5	56.2	0.75	2	2.5	1.6	4.7	61	3.6	0.000231
MS3 632-2	0.25	1.21	0.70	0.40	1.15	0.66	0.38	1.11	0.64	0.37	2840	69.7	68.4	62.5	0.78	2.5	2.7	2	5.2	61	3.9	0.000255
MS3 711-2	0.37	1.74	1.00	0.58	1.65	0.95	0.55	1.59	0.92	0.53	2860	73.8	72.4	66.5	0.76	2.5	2.8	1.8	5.6	64	5.2	0.000369
MS3 712-2	0.55	2.33	1.34	0.78	2.21	1.28	0.74	2.13	1.23	0.71	2860	77.8	63.5	56.2	0.80	3.1	3.1	2	6.5	64	6.2	0.000495

MS3 Series IE3 Efficiency Motors Technical Data (at 50HZ) - 2 pol

Model	Power (kW)	Current(A)			Current(A)			Current(A)			Speed (r/min)	Eff.			Power Factor	Tstart/Tn (Times)	Tmax/Tn (Times)	Tmin/Tn (Times)	Is/In (Times)	Noise dB(A)	W.T (kg)	Inertia kg*m ²
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%								
MS3 713-2	0.75	2.98	1.72	0.99	2.83	1.64	0.94	2.73	1.58	0.91	2870	80.7	80.8	78.2	0.82	3	3.2	2.2	7.1	65	7.1	0.000606
MS3 801-2	0.75	3.02	1.74	1.01	2.87	1.66	0.96	2.76	1.60	0.92	2890	80.7	80.3	77.2	0.81	3.1	3.2	2.3	7.4	67	8.9	0.000972
MS3 802-2	1.1	4.22	2.43	1.41	4.01	2.31	1.34	3.86	2.23	1.29	2890	82.7	82.5	79.9	0.83	3.4	3.4	2	8.7	67	10.6	0.001275
MS3 803-2	1.5	5.79	3.34	1.93	5.50	3.17	1.83	5.30	3.06	1.77	2910	84.2	83.9	81.5	0.81	4	4	2.2	9.6	70	12.5	0.001654
MS3 905-2	1.5	5.72	3.30	1.91	5.43	3.14	1.81	5.24	3.02	1.75	2900	84.2	83.8	81.4	0.82	3.5	3.7	2.1	8.3	72	14	0.002186
MS3 90L1-2	2.2	8.22	4.75	2.74	7.81	4.51	2.60	7.53	4.35	2.51	2910	85.9	86.1	84.7	0.82	3.1	3.5	2.2	8.1	72	16.3	0.002636
MS3 90L2-2	3	11.3	6.54	3.78	10.8	6.21	3.59	10.37	5.99	3.46	2910	87.1	87.1	84.2	0.80	4	4.1	2.6	9.6	74	18.5	0.003406
MS3 100L1-2	3	10.2	5.88	3.39	9.7	5.59	3.23	9.33	5.38	3.11	2910	87.1	87.5	86.3	0.89	3.2	3.6	2.6	9.4	76	23.7	0.004842
MS3 100L2-2	4	13.3	7.66	4.43	12.6	7.28	4.20	12.2	7.02	4.05	2910	88.1	88.7	88.1	0.90	3.3	3.6	2.3	10.1	77	27.6	0.005907
MS3 112M1-2	4	13.1	7.58	4.38	12.5	7.20	4.16	12.0	6.94	4.01	2920	88.1	88.2	87.0	0.91	3.4	3.9	2.4	10.5	77	30.1	0.007505
MS3 112M2-2	5.5	17.8	10.3	5.94	16.9	9.78	5.65	16.3	9.43	5.44	2920	89.2	89.6	89.1	0.91	3.3	4.2	2.9	11.9	78	35.7	0.009251
MS3 132S1-2	5.5	18.2	10.5	6.08	17.3	10.0	5.77	16.7	9.64	5.56	2930	89.2	89.4	88.2	0.89	3.2	4	2.5	10	80	43.4	0.015212
MS3 132S2-2	7.5	24.3	14.1	8.11	23.1	13.4	7.71	22.3	12.9	7.43	2930	90.1	90.2	89.1	0.90	3.6	4.7	2.4	11.9	80	51.7	0.018996
MS3 132M1-2	9.2	29.4	17.0	9.79	27.9	16.1	9.30	26.9	15.5	8.96	2930	90.6	91.2	90.5	0.91	3.2	4.2	2.6	11.6	81	58.3	0.021619
MS3 132M2-2	11	34.5	19.9	11.5	32.8	18.9	10.9	31.6	18.2	10.5	2930	91.2	91.5	91.2	0.92	3.6	4.1	2.4	12.2	83	63.5	0.024142
MS3 132M3-2	15	47.7	27.6	15.9	45.3	26.2	15.1	43.7	25.2	14.6	2940	91.9	92.1	91.2	0.90	4.9	4.9	2	14.4	86	75	0.028557
MS3 160M1-2	11	36.1	20.8	12.0	34.3	19.8	11.4	33.0	19.1	11.0	2960	91.2	91	89.6	0.88	3.2	4	1.4	10.3	86	85.5	0.059613
MS3 160M2-2	15	48.3	27.9	16.1	45.8	26.5	15.3	44.2	25.5	14.7	2960	91.9	91.5	89.9	0.89	3.9	4.2	1.4	11.4	86	104	0.076751
MS3 160L1-2	18.5	57.9	33.4	19.3	55.0	31.8	18.3	53.0	30.6	17.7	2950	92.4	92.8	91.8	0.91	3	3	1.5	9.1	86	121	0.092252
MS3 180M-2	22	68.6	39.6	22.9	65.2	37.6	21.7	62.8	36.3	20.9	2960	92.7	93	92.4	0.91	2.7	3.3	1.7	9	91	130.6	0.104677
MS3 200L1-2	30	94.0	54.3	31.3	89.3	51.6	29.8	86.1	49.7	28.7	2960	93.3	93.2	92.2	0.90	3.5	3.8	1.8	10.2	94	158	0.136738
MS3 200L2-2	37	115.5	66.7	38.5	109.7	63.3	36.6	105.7	61.0	35.2	2960	93.7	93.6	92.6	0.90	3.6	3.7	1.7	9.8	94	173.1	0.163308

MS3 Series IE3 Efficiency Motors Technical Data (at 50HZ) - 4 pol

Model	Power (kW)	Current(A)			Current(A)			Current(A)			Speed (r/min)	Eff.			Power Factor	Tstart/Tn (Times)	Tmax/Tn (Times)	Tmin/Tn (Times)	Is/In (Times)	Noise dB(A)	W.T (kg)	Inertia kg*m ²
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%								
MS3 631-4	0.12	0.70	0.40	0.23	0.66	0.38	0.22	0.64	0.37	0.21	1360	64.8	63.7	57.6	0.70	2.2	2.3	2	3.5	52	3.8	0.000305
MS3 632-4	0.18	0.97	0.56	0.32	0.92	0.53	0.31	0.89	0.51	0.30	1400	69.9	69.6	65.4	0.70	2.2	2.5	2.1	4.1	52	4.5	0.000399
MS3 711-4	0.25	1.30	0.75	0.43	1.23	0.71	0.41	1.19	0.69	0.40	1410	73.5	73.2	69.0	0.69	2.3	2.5	2.1	4.5	55	5.8	0.000717
MS3 712-4	0.37	1.85	1.07	0.62	1.76	1.02	0.59	1.70	0.98	0.57	1420	77.3	77.1	73.6	0.68	2.8	3	2.5	5.2	55	7	0.000965
MS3 801-4	0.55	2.80	1.62	0.93	2.66	1.54	0.89	2.56	1.48	0.85	1440	80.8	79.9	76.0	0.64	3.1	3.3	2.4	6.2	57	9.5	0.001690
MS3 802-4	0.75	3.47	2.00	1.16	3.29	1.90	1.10	3.17	1.83	1.06	1440	82.5	82.5	80.1	0.69	3.1	3.1	2.5	6.3	58	11.7	0.002285
MS3 803-4	1.1	4.65	2.69	1.55	4.42	2.55	1.47	4.26	2.46	1.42	1430	84.1	84.9	83.7	0.74	3	3.1	2.6	6.6	61	13.8	0.002998
MS3 90S-4	1.1	4.72	2.72	1.57	4.48	2.59	1.49	4.32	2.49	1.44	1440	84.1	84.2	82.9	0.73	4	3.4	2.5	7.1	61	15.1	0.003842
MS3 90L1-4	1.5	6.25	3.61	2.08	5.94	3.43	1.98	5.73	3.31	1.91	1430	85.3	85.5	84.1	0.74	3.4	3.3	2.8	7.1	61	18	0.004685
MS3 100L1-4	2.2	8.35	4.82	2.78	7.93	4.58	2.64	7.64	4.41	2.55	1450	86.7	87.1	86.2	0.80	2.8	3.3	2.3	7.9	64	23.9	0.008754
MS3 100L2-4	3	11.5	6.66	3.85	11.0	6.33	3.65	10.6	6.10	3.52	1450	87.7	88	86.9	0.78	3.3	3.4	2.7	8.1	64	28.3	0.011063
MS3 112M1-4	4	14.5	8.37	4.83	13.8	7.95	4.59	13.3	7.66	4.42	1450	88.6	88.8	88.2	0.82	3.1	3.7	2.6	8.6	65	33.9	0.015292
MS3 112M2-4	5.5	20.2	11.7	6.73	19.2	11.1	6.39	18.5	10.7	6.16	1450	89.6	89.9	89.1	0.80	3.8	3.7	2.5	9.1	71	39.1	0.048758


MS3 Series IE3 Efficiency Motors Technical Data (at 50HZ) - 4 pol

Model	Power (kW)	Current(A)			Current(A)			Current(A)			Speed (r/min)	Eff.			Power Factor	Tstart/Tn (Times)	Tmax/Tn (Times)	Tmin/Tn (Times)	Is/In (Times)	Noise dB(A)	W.T (kg)	Inertia kg*m ²
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%								
MS3 132S-4	5.5	19.2	11.1	6.41	18.3	10.5	6.09	17.6	10.2	5.87	1460	89.6	89.8	89.4	0.84	2.3	3.5	1.9	9	71	47.4	0.034464
MS3 132M1-4	7.5	26.0	15.0	8.66	24.7	14.3	8.23	23.8	13.7	7.93	1460	90.4	90.9	90.3	0.84	2.6	3.4	2.2	8.9	71	57.4	0.043597
MS3 132M2-4	9.2	32.5	18.8	10.8	30.9	17.8	10.3	29.8	17.2	9.93	1460	90.8	91.3	90.7	0.82	3.2	3.6	2	10	74	60	0.051339
MS3 132M3-4	11	37.7	21.8	12.6	35.8	20.7	11.9	34.5	19.9	11.5	1460	91.4	92	91.6	0.84	3.5	3.7	2.1	10.5	75	67	0.060372
MS3 160M-4	11	38.2	22.0	12.7	36.3	20.9	12.1	34.9	20.2	11.6	1470	91.4	91.7	89.8	0.83	2.6	2.8	1.8	7.6	75	89	0.105373
MS3 160L1-4	15	50.4	29.1	16.8	47.9	27.7	16.0	46.2	26.7	15.4	1470	92.1	92.3	91.3	0.85	3	3	2	9.2	75	110.5	0.137038
MS3 180M-4	18.5	61.1	35.3	20.4	58.1	33.5	19.4	56.0	32.3	18.7	1470	92.6	92.8	92.1	0.86	2.8	3.3	1.9	8.8	80	130	0.173293
MS3 180L-4	22	72.4	41.8	24.1	68.8	39.7	22.9	66.3	38.3	22.1	1470	93	93.1	92.3	0.86	3	3.5	2.1	9.3	80	145.4	0.200637
MS3 200L-4	30	95.8	55.3	32.0	91.1	52.6	30.4	87.8	50.7	29.3	1470	93.6	93.7	92.9	0.88	3.2	3.7	2.1	9.7	83	180	0.265100

MS3 Series IE3 Efficiency Motors Technical Data (at 50HZ) - 6 pol








Model	Power (kW)	Current(A)			Current(A)			Current(A)			Speed (r/min)	Eff.			Power Factor	Tstart/Tn (Times)	Tmax/Tn (Times)	Tmin/Tn (Times)	Is/In (Times)	Noise dB(A)	W.T (kg)	Inertia kg*m ²
		220V	380V	660V	230V	400V	690V	240V	415V	720V		100%	75%	50%								
MS3 711-6	0.18	1.20	0.69	0.40	1.14	0.66	0.38	1.09	0.63	0.36	930	63.9	61	53.4	0.62	2.4	2.6	2.3	3.5	52	5.4	0.000790
MS3 712-6	0.25	1.48	0.85	0.49	1.40	0.81	0.47	1.35	0.78	0.45	920	68.6	67.2	61.2	0.65	2.2	2.5	2.2	3.7	52	6.3	0.001020
MS3 801-6	0.37	1.95	1.12	0.65	1.85	1.07	0.62	1.78	1.03	0.59	930	73.5	73.8	70.5	0.68	2.2	2.5	2.1	4.1	56	9.3	0.002189
MS3 802-6	0.55	2.64	1.52	0.88	2.51	1.45	0.84	2.42	1.40	0.81	930	77.2	78.1	75.7	0.71	2.3	2.4	2.1	4.3	56	10.9	0.002931
MS3 90S-6	0.75	3.73	2.16	1.24	3.55	2.05	1.18	3.42	1.97	1.14	950	78.9	80.1	78.1	0.67	2.3	2.6	2.1	4.7	59	13.8	0.004070
MS3 90L-6	1.1	5.33	3.08	1.78	5.07	2.93	1.69	4.88	2.82	1.63	950	81	81.1	78.4	0.67	2.7	2.9	2.5	5.2	59	16.2	0.005487
MS3 90L2-6	1.5	7.14	4.12	2.38	6.78	3.92	2.26	6.54	3.78	2.18	950	82.5	82.7	80.5	0.67	2.9	3	2.6	5.6	61	21.3	0.006895
MS3 100L-6	1.5	6.84	3.95	2.28	6.49	3.75	2.16	6.26	3.61	2.09	955	82.5	83	81.8	0.70	2.4	2.9	2.2	5.5	61	22.1	0.009137
MS3 100L2-6	2.2	9.54	5.51	3.18	9.06	5.23	3.02	8.73	5.04	2.91	955	84.3	85.1	83.9	0.72	2.5	3	2.3	6.2	64	27.7	0.012725
MS3 112M-6	2.2	10.1	5.83	3.37	9.59	5.54	3.20	9.25	5.34	3.08	965	84.3	84.5	83.2	0.68	2	2.5	1.8	5.5	64	27.1	0.017675
MS3 112M2-6	3	13.4	7.72	4.46	12.7	7.33	4.23	12.2	7.07	4.08	965	85.6	86.2	84.8	0.69	2.5	2.9	1.9	6.3	64	33.1	0.021400
MS3 132S-6	3	12.5	7.20	4.15	11.8	6.84	3.95	11.4	6.59	3.80	965	85.6	86	85.1	0.74	2	2.7	1.7	6	64	38.6	0.033804
MS3 132M1-6	4	16.4	9.46	5.46	15.6	8.99	5.19	15.0	8.66	5.00	970	86.8	87.1	86.2	0.74	2.3	3	1.8	6.8	68	47.6	0.043946
MS3 132M2-6	5.5	23.2	13.4	7.72	22.0	12.7	7.34	21.2	12.2	7.07	975	88	88.3	87.1	0.71	2.9	3.5	2.2	7.4	68	55.7	0.053987
MS3 132M3-6	7.5	30.8	17.8	10.3	29.2	16.9	9.74	28.2	16.3	9.39	970	89.1	89.6	88.6	0.72	3.3	3.2	2	8.3	68	67.6	0.070723
MS3 160M-6	7.5	29.1	16.8	9.72	27.7	16.0	9.23	26.7	15.4	8.90	975	89.1	89.5	88.5	0.76	2.2	2.9	1.8	7.3	68	79.6	0.109012
MS3 160L-6	11	41.1	23.7	13.7	39.0	22.5	13.0	37.6	21.7	12.5	975	90.3	90.8	89.9	0.78	2.7	2.9	1.2	8.4	73	105	0.154850
MS3 180L-6	15	52.1	30.1	17.4	49.5	28.6	16.5	47.7	27.6	15.9	960	91.2	90.9	89.4	0.83	2.3	2.9	2.1	7.8	79	125.2	0.275157
MS3 200L1-6	18.5	66.4	38.3	22.1	63.0	36.4	21.0	60.8	35.1	20.3	980	91.7	91.5	90.1	0.80	2.7	3.7	2.2	9.8	82	143	0.332066
MS3 200L2-6	22	78.5	45.3	26.2	74.6	43.1	24.9	71.9	41.5	24.0	980	92.2	92	90.6	0.80	2.9	3.7	2.3	10.5	82	162	0.388316

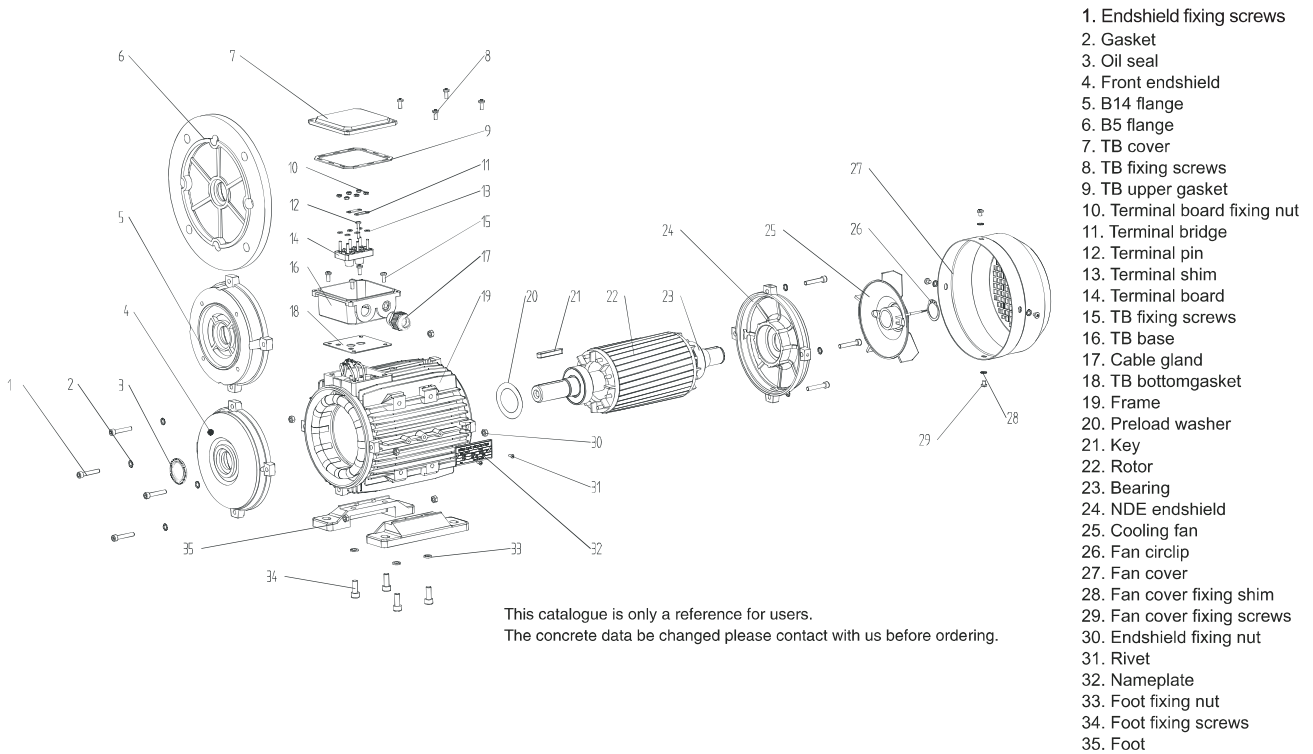




Motor Spare Part List "Exploded Drawing"



Mountings and Positions

Mountings and positions for standard motors, according to IEC 60034-7, are defined by the codes mentioned in the following table.

	Standards			Frame Sizes
	CEI 2-14	IEC 60034-7		56-200
		Code I	Code II	
	B3	IM B3	IM 1001	Standard
	B3/B5	IM B35	IM 2001	Standard
	B5	IM B5	IM 3001	Standard
	B14	IM B14	IM 4001	Standard
	B8	IM B8	IM 1071	Upon request
	B6	IM B6	IM 1051	Upon request
	B7	IM B7	IM 1061	Upon request

	Standards			Frame Sizes
	CEI 2-14	IEC 60034-7		56-200
		Code I	Code II	
	V1	IM V1	IM 3011	Standard
	V3	IM V3	IM 3031	Upon request
	V5	IM V5	IM 1011	Upon request
	V6	IM V6	IM 1031	Upon request
	V1/V5	IM V15	IM 2011	Upon request


Aluminum Housing Electric Motors Bearings & Oil Seals

Frame	Bearings		Oil Seals	
	Drive End	Non-drive End	Drive End	Non-drive End
63	6201	6201	12×24×5	12×24×5
71	6202	6202	15×25×7	15×25×7
80	6204	6204	20×34×7	20×34×7
90S	6205	6205(6204)※※	25×37×7	25×37×7(20×34×7)
90L	6205	6205(6204)※※	25×37×7	25×37×7(20×34×7)
100L	6206	6206	30×44×7	30×44×7
112M	6306	6206(6306)	30×44×7	30×44×7
132S	6308	6208(6308)	40×58×7	40×58×7
132M/L	6308	6208(6308)	40×58×7	40×58×7
160M	6309	6309	45×65×8	45×65×8
160L	6309	6309	45×65×8	45×65×8
180M	6311	6211	55×72×8	55×72×8
180L	6311	6211	55×72×8	55×72×8
200L	6312	6212	60×80×8	60×80×8


※ Other standards are also available on request, the figures in brackets() are for the MC/ML single phase motors

MS2/MS3 Series Dimensional Drawings


IM B3




IM B5

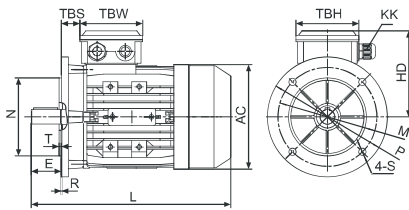



IM B14

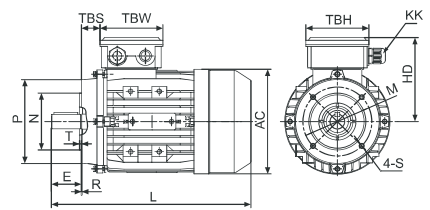

IM B34



IM B35

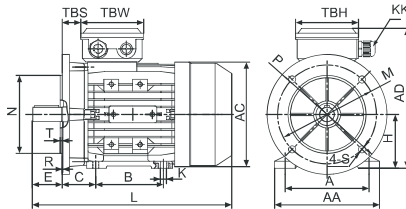

Installation Dimension

Frame	Foot Mounting					Shaft							General										
	H	A	B	C	K	D	E	F	G	SS	XX	ZZ	AA	AD	HD	AC	L	LCCL [°]	KK	TBS	TBW	TBH	
56	56	90	71	36	5.8X8.8	Ø9	20	3	7.2	M3	9	12	110	156	100	Ø117	196	232	1-M16X1.5	14	88	88	
63	63	100	80	40	7X10	Ø11	23	4	8.5	M4	10	14	120	171	108	Ø130	220	258	1-M16X1.5	14	94	94	
71 ^{°*}	71	112	90	45	7X10	Ø14	30	5	11	M5	12	17	132	186	115	Ø147	241(255)	282(296)	1-M20X1.5	20	94	94	
80	80	125	100	50	10X13	Ø19	40	6	15.5	M6	16	21	160	213	133	Ø163	290	339	1-M20X1.5	27	105	105	
90S	90	140	100	56	10X13	Ø24	50	8	20	M8	19	25	175	229	139	Ø183	312	361	1-M20X1.5	30	105	105	
90L1/L2	90	140	125	56	10X13	Ø24	50	8	20	M8	19	25	175	229	139	Ø183	337/367	386/416	1-M20X1.5	30	105	105	
100 ^{°*}	100	160	140	63	12X15	Ø28	60	8	24	M10	22	30	198	252	152	Ø205	369(387)	425(443)	2-M20X1.5	26	105	105	
112	112	190	140	70	12X15	Ø28	60	8	24	M10	22	30	220	279	167	Ø229	395	463	2-M25X1.5	32	112	112	
132S	132	216	140	89	12X15	Ø38	80	10	33	M12	28	37	252	318	186	Ø265	437	497	2-M25X1.5	38	112	112	
132M/L	132	216	178	89	12X15	Ø38	80	10	33	M12	28	37	252	318	186	Ø265	475/501	535/561	2-M25X1.5	38	112	112	
160M/L	160	254	210/254	108	15X19	Ø42	110	12	37	M16	36	45	290	384	224	Ø325	640	697	2-M32X1.5	64	143	143	
180M/L	180	279	241/279	121	15X25	Ø48	110	14	42.5	M16	36	45	340	440	260	Ø368	730		2-M32X1.5	73	190	190	
200L	200	318	305	133	19X29	Ø55	110	16	49	M20	42	53	390	460	260	Ø368	745		2-M40X1.5	85	190	190	

Frame	B5						B5R						B14						B14B					
	M	N	P	T	S	R	M	N	P	T	S	R	N	M	P	T	S	R	N	M	P	T	S	R
56	Ø100	Ø80	Ø120	3.0	Ø7	0							Ø50	Ø65	Ø80	2.5	M5	0						
63	Ø115	Ø95	Ø140	3.0	Ø10	0							Ø60	Ø75	Ø90	2.5	M5	0	Ø80	Ø100	Ø120	3.0	M6	0
71 ^{°*}	Ø130	Ø110	Ø160	3.5	Ø10	0	Ø115	Ø95	Ø140	3.5	Ø10	0	Ø70	Ø85	Ø105	2.5	M6	0	Ø95	Ø115	Ø140	3.0	M8	0
80	Ø165	Ø130	Ø200	3.5	Ø12	0	Ø130	Ø110	Ø160	3.5	Ø10	0	Ø80	Ø100	Ø120	3.0	M6	0	Ø110	Ø130	Ø160	3.5	M8	0
90S	Ø165	Ø130	Ø200	3.5	Ø12	0	Ø130	Ø110	Ø160	3.5	Ø10	0	Ø95	Ø115	Ø140	3.0	M8	0	Ø110	Ø130	Ø160	3.5	M8	0
90L1/L2	Ø165	Ø130	Ø200	3.5	Ø12	0	Ø130	Ø110	Ø160	3.5	Ø10	0	Ø95	Ø115	Ø140	3.0	M8	0	Ø110	Ø130	Ø160	3.5	M8	0
100 ^{°*}	Ø215	Ø180	Ø250	4.0	Ø15	0	Ø165	Ø130	Ø200	4.0	Ø12	0	Ø110	Ø130	Ø160	3.5	M8	0	Ø130	Ø165	Ø200	3.5	M10	0
112	Ø215	Ø180	Ø250	4.0	Ø15	0	Ø165	Ø130	Ø200	4.0	Ø12	0	Ø110	Ø130	Ø160	3.5	M8	0	Ø130	Ø165	Ø200	3.5	M10	0
132S	Ø265	Ø230	Ø300	4.0	Ø15	0	Ø215	Ø180	Ø250	4.0	Ø15	0	Ø130	Ø165	Ø200	4.0	M10	0	Ø180	Ø215	Ø250	4.0	M12	0
132M/L	Ø265	Ø230	Ø300	4.0	Ø15	0	Ø215	Ø180	Ø250	4.0	Ø15	0	Ø130	Ø165	Ø200	4.0	M10	0	Ø180	Ø215	Ø250	4.0	M12	0
160M/L	Ø300	Ø250	Ø350	5.0	Ø19	0							Ø180	Ø215	Ø250	4.0	M12	0						
180M/L	Ø300	Ø250	Ø350	5.0	Ø19	0																		
200L	Ø350	Ø300	Ø400	5.0	Ø19	0																		

*** This frame size has two housing sizes, the rated output is for normal "L" size, and increased output is for the bigger "L" size (refer to the figures in the bracket (" "))